

Rack Mount Sinewave Inverter




- True On line Sinewave Output
- Full Bridge IGBT Inverter
- 50 KHz SMPS Design
- Electronic Output Short Circuit Protection
- Wide Input Voltage
- High Efficiency
- High Reliability
- Auto Restart
- EMI / RFI Filter
- Audible and Visual Indicator
- Rack Mount 19"
- Easy to Install


Protect your computer and sensitive equipments from any electrical disturbance.

ITEM		UNITS	SPECIFICATION								REMARKS
MODEL			INV500	INV1000-24	INV1000	INV2000-24	INV2000	INV2000-110	INV3000	INV4000	
CAPACITY		VA/W	600/500	1000/800		2000/1600			3000/2400	4000/3200	
DC INPUT	VOLTAGE	V	44 ~ 58	22 ~ 28	44 ~ 58	22 ~ 28	44 ~ 58	95 ~ 121	44 ~ 58		
	MAX CURRENT	A	12.5	36	23	72	46	21.3	69	92	
	PROTECTION		FUSE								
INVERTER OUTPUT	WAVE FORM		SINEWAVE								
	DISTORTION		< 3% THD								LOAD 0~100%
	TOPOLOGY		PULSE WIDTH MODULATION (PWM)								
	VOLTAGE	V	220 ± 2%								
	FREQUENCY	Hz	50 ± 1%								
	EFFICIENCY	%	> 85								AT FULL LOAD
BUZZER	BATTERY / DC INPUT LOW		INTERMITTENT SOUND WITH 1 SECOND INTERVAL								< LOWEST DC INPUT
OPERATION TEMPERATURE		°C	0 ~ 40								
DIMENSION		mm	430 x 435 x 87			590 x 435 x 87			590 x 435 x 176		D x W x H
WEIGHT	Kg		8			13			21.5	24	NETTO
			9			14			22.5	25	GROSS


SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.



REAR PANEL INV500, INV1000, INV1000-24

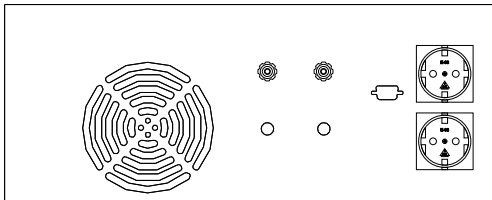

REAR PANEL INV2000, INV2000-24, INV2000-110

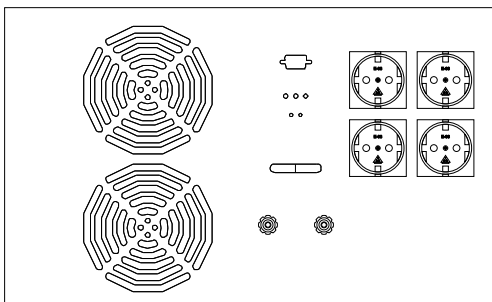

REAR PANEL INV3000, INV4000

Contact Person



481-4A10010-110